



Ultrasonic Cleaner Dual Frequency

RM series is ultrasonic cleaner dual frequency suitable for industrial applications. The core component ultrasonic generator adopts the most advanced T technology platform which has high cleaning efficiency, simple operations and no need of debugging on site. Ultrasonic cleaner dual frequency can be widely used in metal products, auto parts, electronics cleaning, medical instruments, optical glass cleaning etc.

Ultrasonic Cleaner Dual Frequency From China Manufacturers and Suppliers

1.Ultrasonic Cleaner Dual Frequency Introduction

RM series is ultrasonic cleaner dual frequency suitable for industrial applications. The core component ultrasonic generator adopts the most advanced T technology platform which has high cleaning efficiency, simple operations and no need of debugging on site. Ultrasonic cleaner dual frequency can be widely used in metal products, auto parts, electronics cleaning, medical instruments, optical glass cleaning etc.

Ultrasonic frequency is available for 25/45kHz, 28/68kHz, 40/80kHz, 40/130kHz and 80/130kHz. The default frequency is 28kHz and 68kHz. If other frequency needed, please contact us.

Standard power supply for RM120 is 220V/50Hz. Other power supply, please contact us by info at clangsonic.com.



Clangsonic provides varies of capacities of ultrasonic cleaner. Please contact us for customized tank size.

2.Ultrasonic Cleaner Dual Frequency Parameter (Specification)

Name	Dual-Frequency Ultrasonic Cleaner				
Model	RM85	RM120	RM160	RM210	RM520
Capacity	85L	120L	160L	210L	520L
Ultrasonic Frequency	25/45kHz, 28/68kHz, 40/80kHz, 40/130kHz, 80/130kHz				
Ultrasonic Power	1500W	1800Watts	2400Watts	4000Watts	6000Watts
Power Adjustment	10-100%				
Heating Power	5KW	6KW	8KW	10KW	10KW
Heating Temperature	30-80°C				
Timing	0-60min. or ∞				
Inner Tank Size	600x400x350mm	650x450x400mm	700x500x450mm	680x620x500mm	2100x450x530mm
Basket Size	510x330x180mm	560x380x230mm	600x425x260mm	580x580x400mm	2000x350x300mm
Overall Size	700x600x800mm	750x650x800mm	880x700x850mm	780x820x850mm	2260x785x900mm

Tank	SUS304 or SUS316L	
Material		
Power	220V/50Hz, 1 Phase	380V/50Hz, 3 Phase
Supply		
Power		
Cable	3m	
Length		
SUS Cover	√	
Rolling	√	
Wheel		
Circulation	optional	
System		
Oil	optional	
SKimmer		

3. Ultrasonic Cleaner Dual Frequency Features and Application

1. Dual-Frequency

2 frequencies can be switched easily as you need. Ultrasonic cleaner dual frequency for different cleaning process, you can choose different frequency, and it is also very suitable for workpiece which needs both coarse and fine cleaning.

2. Automatic Sweep

Ultrasonic cleaner dual frequency sweep function can eliminate the standing waves effectively. That's helpful to improve ultrasonic distribution in the tank and make cleaning more uniformly.

3. 2 Times Peak Power

2 times peak power excitation can act on stubborn stains and semi-aqueous solvents, ultrasonic performance is improved obviously.

4. Linearly Adjustable Power

Ultrasonic power can be adjusted 10-100% linearly, which is more precisely for different cleaning request.

5. Load Self-Adaption

Ultrasonic cleaner dual frequency will adjust itself to fit to different working conditions (liquid temperature, liquid level and with/without workpiece) automatically, and maintain the optimal working frequency and constant power output.

6. High Definition Industrial Level LCD Display

User-friendly LCD display allows user to monitor working status and set parameters.

7. Efficient Cleaning

Ultrasonic cleaner dual frequency adopting peak modulation technology which can breakdown the bubbles more quickly and remove the stubborn stains easily. Under same condition, the breakdown speed of foil is significantly improved.

8. Stable Output

Self-adaption technology can ensure the machine to fit to load changing perfectly, such as different liquid level, liquid temperature changing and workpiece movement. Ultrasonic performance will keep still.

9. High Conversion Efficiency

The ultrasonic cleaner dual frequency conversion efficiency of ultrasonic and electric energy is more than 95%. The energy conversion is more than others at same ultrasonic power output.

10. Extended Function

Ultrasonic cleaner dual frequency are circulation system, oil skimmer, bubbling tank, rinsing tank, high pressure spraying tank and drying tank can be extended as your demands.

Application:

The ultrasonic cleaning machine is suitable for cleaning circuit boards, bearing components, optical lenses, motorcycle part, ion plating part, electroplating parts, audioprefixes, clock parts, semiconductor wafers, magnetic materials, polyester.

1. Jewelry (Jewels, Jade, Gold and Silver)



2. Auto parts (Cylinder Block, Bearing, Valvebody and so on)




3. Precision parts (Mobile Accessories, Watch parts)



4. Material (Steel, Cooper, Plastic,)




5. Optical and electronics (Semiconductor, Optical lens, Electronic parts,)



6. Appliance Application (Fruit, Stainless Steel Cutlery, Crockery)



4. Details Images

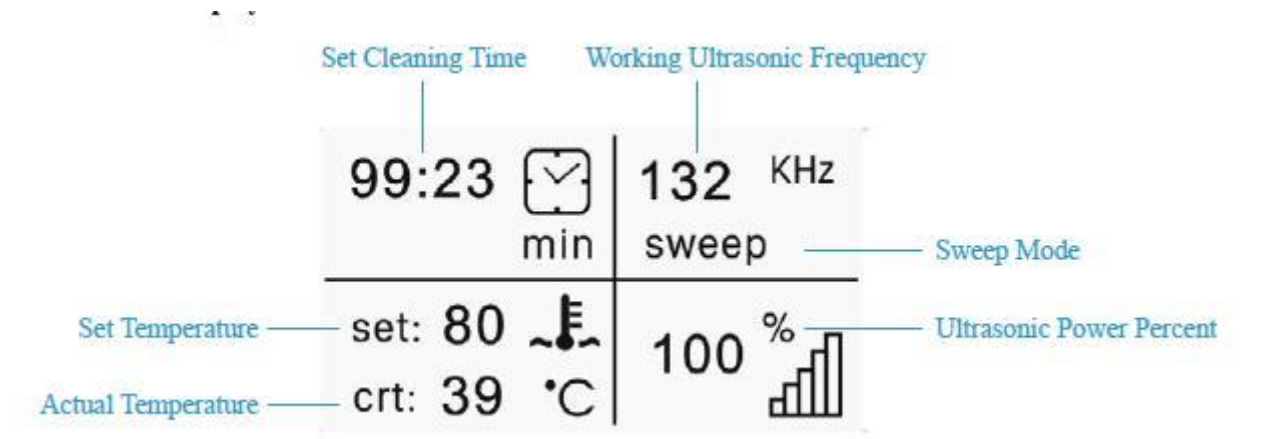

Function Description

1.Appearance



clangsônic

www.clangsonicultrasonics.com

clangsônic



Tel:+86-576-87276622

Email:info@clangsonic.com

clangsônic


www.clangsonicultrasonics.com

clangsônic



Tel:+86-576-87276622

Email:info@clangsonic.com

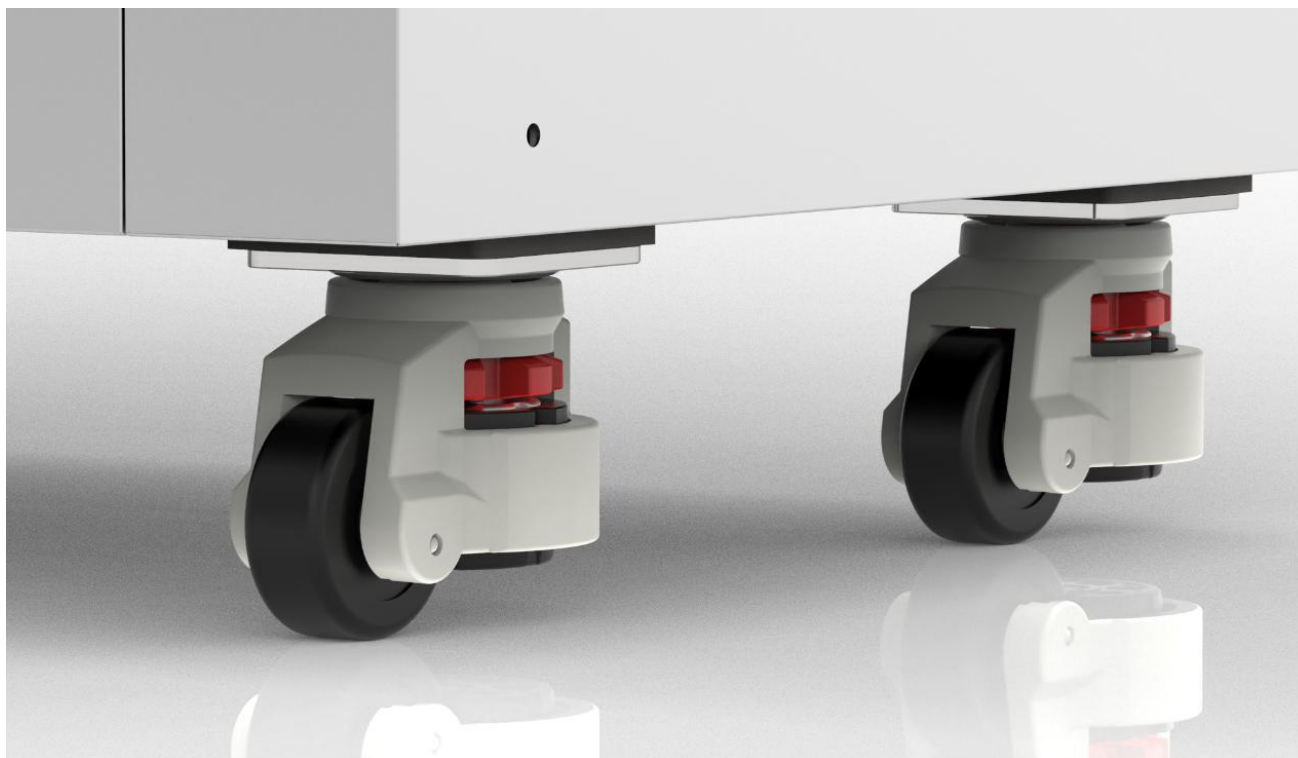



Optional Circulation System with Oil Skimmer For Heavy Duty and Oily Workpiece Cleaning

5. Company Qualification

clangsonic

Yuhuan Clangsonic Ultrasonic Co., Ltd. is a professional engaged in ultrasonic transducer, ultrasonic shock box, ultrasonic (generator) power and ultrasonic equipment research and application of the manufacturer.

Since 2003 the company since its establishment, unswervingly adhere to the higher quality and better service as our ultimate goal.

Our products are exported to the world more than 40 countries and regions. To provide customers with a full range of ultrasonic products and solutions, so that waves of the company to become a global customer real partners.



The company has an effective construction area of over 6,000 square meters, with imported Tian Tian, Baichao sheet metal bending machine, KUKA robot, as well as the Swedish fuse factory, and CNC sawing machine, CNC lathe, CNC milling machine and other equipment, making the product more reliable.

Visit Factory



Workshop



Exhibition





6. Deliver, Shipping and Serving





To better ensure the safety of your goods, professional, environmentally friendly, convenient and efficient packaging services will be provided.

CLANGSONIC

Shipping & Payment

Started working again,Started working again,Started working again.



7. FAQ

1. Are you manufacturer or trading company?

We are manufacturer. All the core components (ultrasonic transducer, ultrasonic generator) are home-made by ourselves.

2. Do you accept OEM and ODM?

Yes, we also have profession R&D teams (ultrasonic transducer team, ultrasonic generator team and mechanical design team) to responds your special needs quickly.

3. Delivery time



www.clangsonicultrasonics.com

Standard products can be delivered within 7 working days. Customized machine depend on the design.

4. Warranty

We guarantee quality of the products for a period of 1 year. If any quality problem within warranty, we'll provide free spare parts or repairing service.

5. Do you provide trial cleaning service?

Yes, you're welcome to send the workpieces for trial cleaning. We'll send you video and report about the test. It's free service.

6. Can you provide ultrasonic transducer or generator if any failure?

Yes, ultrasonic transducer and ultrasonic generator are designed and manufactured by ourselves. We can send the right parts quickly for replacement.

7. Payment Methods?

T/T ,L/C, D/P ,D/A, West Union , Paypal, MoneyGram ,Escrow .

8. Which frequency and power is suitable for our workpiece?

Please contact us and provide details as specific as you can. Information includes: the size, material, weight and dirt of your workpiece and cleaning tank dimension etc.